

CARATTERISTICHE TECNICHE - *TECHNICAL CHARACTERISTICS* - TECHNISCHE EIGENSCHAFTEN
 CARACTÉRISTIQUES TECHNIQUES - CARACTERÍSTICAS TÉCNICAS - *TECHNISCHE EIGENSCHAPPEN*

Prestazioni - Performance - Leistungen - Performances - Prestaciones - Prestaties

Motore 4 cilindri - *4 cylinder engine* - 4-Zylinder Motor
 Moteur 4 cylindres - Motor de 4 cilindros - *Motor met 4 cilinders*1498 cc

Potenza 29 CV/HP - *Power 29 CV/HP* - Leistung 29 PS/HP
 Puissance 29 CV/HP - Potencia 29 CV/HP - *Vermogen 29 CV/HP*..... 21,3 Kw

Prima velocità - *First speed* - Erste Geschwindigkeit
 Première vitesse - Primera velocidad - *Eerste versnelling* max 3,5 Km/h

Seconda velocità - *Second speed* - Zweite Geschwindigkeit
 Deuxième vitesse - Segunda velocidad - *Tweede versnelling* max 6,5 Km/h

Cingoli - *Tracks* - Ketten
 Chenilles - Orugas - *Rupsbanden*.....Gomma - *Rubber* - Gummi - *Caoutchouc* - Goma - *Rubber*

Dimensioni zolle - *Rootball Dimensions* - Ballengröße

Dimensions des mottes - Dimensiones de los cepellones - *Afmeting kluiten*
 Ø minimo - *Minimum diameter* - Ø Mindestens
 Minimum Ø - Ø minimo - *Minimum Ø* 25 cm

Ø massimo - *Maximum diameter* - Ø Höchstens
 Maximum Ø - Ø máximo - *Maximum Ø*100 cm

Dimensioni - *Dimensions* - Abmessungen - *Dimensions* - Dimensiones - *Afmetingen*

Lunghezza (senza lama) - *Lenght (without blade)* - Länge (ohne Messer)
 Longueur (sans lame) - Longitud (sin hoja) - *Lengte (zonder mes)*.....2470 mm

Larghezza (con cingoli chiusi) - *Width (with closed tracks)* - Breite (bei geschlossenen Ketten)
 Largeur (chenilles fermées) - Anchura (con orugas cerradas) - *Lengte (met gesloten rupsbanden)*840 mm

Larghezza (con cingoli aperti) - *Width (with opened tracks)* - Breite (bei geöffneten Ketten)
 Largeur (chenilles ouvertes) - Anchura (con orugas abiertas) - *Lengte (met verbrede rupsbanden)*.....1230 mm

Altezza (compreso roll-bar) - *Height (roll-bar included)* - Höhe (einschl. Roll-Bar)
 Hauteur (roll-bar inclus) - Altura (incluida barra antivuelco roll-bar) - *Hoogte (inclusief roll-bar)*.....2170 mm

Peso - *Weight* - Gewicht - *Poids* - Peso - *Gewicht*
 senza lama - *without blade* - ohne Messer - *sans lame* - sin hoja - *zonder mes*1600 Kg

SERVIZIO ASSISTENZA puntuale ed efficiente grazie ai magazzini ricambi dislocati in Italia e nel mondo
Prompt and efficient ASSISTANCE SERVICE thanks to spare parts warehouses located in Italy and throughout the world
 Pünktlicher und effizienter KUNDENDIENST mit Ersatzteillagern an verschiedenen Orten in Italien und der ganzen Welt
SERVICE D'ASSISTANCE ponctuel et efficient grâce aux stocks de pièces de rechange en Italie et dans le monde
 SERVICIO DE ASISTENCIA puntual y eficiente gracias a los almacenes de recambios distribuidos en Italia y en el mundo
Stipte en efficiënte BUSTAND dankzij de vele magazijnen met vervangstukken gelegen in Italie ed de wereld

art.directive.gruppocal.com

HOLMAC®

Via Canada, 13 - 35127 Padova Zona Ind.le - Italy - Tel. +39 049 8792502 - Fax +39 049 8792498 - e-mail: info@holmac.com

Holmac Service - Pistoia

Via G. Galilei, 13 - Tel. +39 0573 531293 - Fax +39 0573 536559

HZC 25

M A C C H I N E E A T T R E Z Z A T U R E P E R V I V A I

HOLMAC®



www.holmac.com

HZC 25

AGILE, SOLO 1600 KG DI PESO
NIMBLE, WEIGHS ONLY 1600 KG
WENDIG, GEWICHT NUR 1600 KG
AGILE, POUR UN POIDS DE 1600 KG SEULEMENT
ÁGIL, SOLO 1600 KG DE PESO
VLOT MANOEUVREERBAAR DANKZIJ ZIJN LAAG
GEWICHT VAN SLECHTS 1600 KG




RAPIDITA' DI ESTRAZIONE
RAPID EXTRACTION
SCHNELLES AUSGRABEN
RAPIDITÉ D'EXTRACTION
RAPIDEZ DE EXTRACCIÓN
SNELLE UITTREKKING



SOLO 84 CM DI LARGHEZZA - *ONLY 84 CM WIDE*
BREITE NUR 84 CM - *SEULEMENT 84 CM DE LARGEUR*
SOLÓ 84 CM DE ANCHURA - *BREEDTE VAN SLECHTS 84 CM*



APERTURA / AVANZAMENTO CINGOLI - *OPENING / FORWARD MOVEMENT OF TRACKS*
ÖFFNEN / VORSCHUB DER KETTEN - *OUVERTURE / AVANCE DES CHENILLES*
APERTURA / AVANCE ORUGAS - *RUPS BANDEN MET VERPLAATSING VAN DE MESSEN*

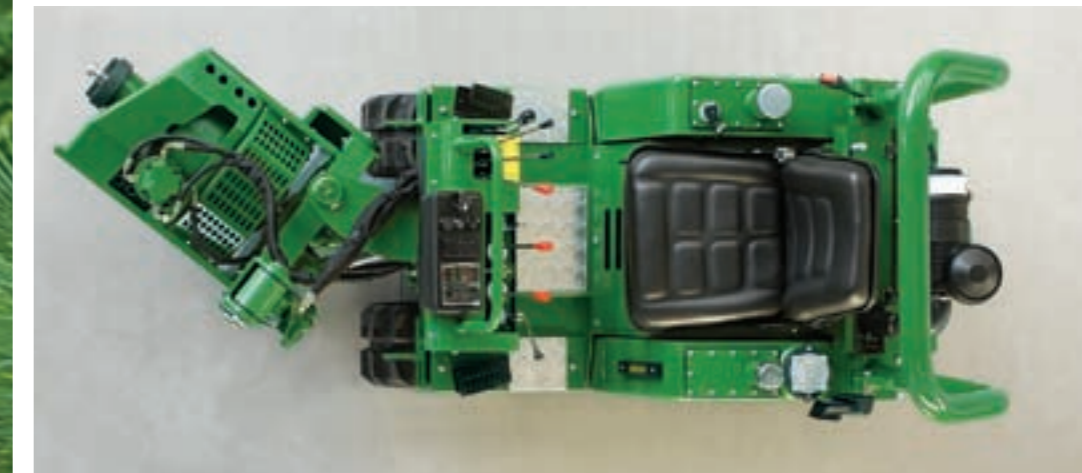

SPOSTAMENTO LATERALE DELLA LAMA - *SIDE MOVEMENT OF BLADE*
SEITENVERSCHIEBUNG DES MESSERS - *DEPLACEMENT LATERAL DE LA LAME*
DESPLAZAMIENTO LATERAL DE LA HOJA - *ZIJWAARTSE VERPLAATSING VAN DE MESSEN*



UTENSILI DI ALTA QUALITÀ
HIGH QUALITY TOOLS
QUALITÄTSWERKZEUGE
OUTILS DE GRANDE QUALITÉ
EQUIPOS DE ALTA CALIDAD
HOOG KWALITATIEVE
GEREEDSCHAPPEN

DOPPIA VELOCITÀ DI AVANZAMENTO
DOUBLE FORWARD SPEED
ZWEI FAHRGESCHWINDIGKEITEN
DOUBLE VITESSE D'AVANCE
DOS VELOCIDADES DE AVANCE
DUBBELE VORDERINGSSNELHEID

POTENZA, IMPIANTO IDRAULICO
CON MOTORE A 4 CILINDRI

POWER, HYDRAULIC SYSTEM
WITH 4-CYLINDER ENGINE

LEISTUNGSSTARK, HYDRAULIKANLAGE
MIT 4-ZYLINDER MOTOR

PUISSANCE, CIRCUIT HYDRAULIQUE
AVEC MOTEUR À 4 CYLINDRES

POTENCIA, SISTEMA HIDRÁULICO
CON MOTOR DE 4 CILINDROS

VERMOGEN, HYDRAULISCH SYSTEEM
MET MOTOR MET 4 CILINDERS



ADATTABILITÀ, LAME
INTERCAMBIABILI PER ESTRAZIONI
DA 25cm A 1 METRO

ADAPTABILITY, INTERCHANGEABLE
BLADES FOR EXTRACTION
FROM 25 CM TO 1 METRE

ANPASSUNGSFÄHIG:
AUSWECHSELBARE MESSER
FÜR AUSGRABTIEFEN ZWISCHEN
25 CM UND 1 METER

ADAPTABILITÉ, LAMES
INTERCHANGEABLES POUR DES
EXTRACTIONS DE 25 CM à 1 MÈTRE

FLEXIBLE, HOJAS INTERCAMBIABLES
PARA EXTRACCIONES DE
25 CM a 1 METRO

MAKKELIJK AANPASBAAR,
VERWISSELBARE MESSEN VOOR
UITTREKKING VAN 25 CM
TOT 1 METER

