

# RINK



Breaking barriers to better turf.

## BRUSH SPREADERS



The Rink topdressers contain a rear brush that throws topdressing material with great force between the grass blades.

A wide range is available from self-propelled units up to various tow behind models.

The Rink topdressers are the most accurate topdressers on the market. The speed of the belt and the brush are adjusted separately so that an accurate spreading thickness is obtained, from very thin to very thick.

The Rinks are characterized by their very large working widths so that a minimal amount of passes over a turf area is needed.



Rink 1015  
Selfpropelled



The Rink 1015 contains a strong Honda engine of 13HP and a large working width of 1.5m



The Rink 1010 has floating tyres, minimizing ground pressure. The hopper is made of aluminium to avoid rusting (like other models).

Rink 1210



The Rink 1210 is low to the ground, for easy refilling and ensuring the operator a good rear view.

## Technical Specifications

Model	Rink 1015 selfpropelled	Rink 1010	Rink 1210
Spreading width	1.5m	1.5m	1.8m (covers wheel marks of tractor)
Spreading thickness	0.3 to 10mm	0.3 to 10mm	0.3 to 10mm
Weight	350kg	270kg	370kg
Hopper capacity	0.5m <sup>3</sup> level	1.0m <sup>3</sup> level	1.0m <sup>3</sup> level
Tractor size	selfpropelled	20HP + ;	20HP + ;
		Double acting hydraulic valve and min.oil supply of:	
		12ltr/min at 120 bar	20ltr/min at 140 bar

Optional Rink 1010 and 1210:

Auxiliary tank and pump kit.  
Twin Spinners.  
Conveyor belt



The Rink 1520 can spread extremely accurately.



Rink 3045

The Rink 3045 has a capacity of 4,5 mtr<sup>3</sup>

## Technical Specifications

Model	Rink 1520	Rink 3045	Rink 2020
Working width	1.4m	2.0m	1.4m
Spreading thickness	0.3 to 40mm	idem	3 to 25mm
Weight	950kg	1950kg	950kg
Hopper capacity	2.0m <sup>3</sup> level	4.5m <sup>3</sup> level	2.0m <sup>3</sup> level
Tractor size	25HP +; Double acting hydraulic valve and min. oil supply of : 25ltr/min at 140 bar	65HP +; 40ltr/min at 175 bar	25HP

Optional:

- Auxiliary tank and pump kit (Rink 2020 not)
- Twin Spinners (Rink 1520 only)
- Higher plates for extra capacity
- Extra wide wheel axles
- Mesh cover



Rink 2020




The PTO driven Rink 2020 contains a drum at the rear and is ideal to spread coarse material.



Rink 1005

The Rink 1005 is carried in the 3-point hitch of the tractor

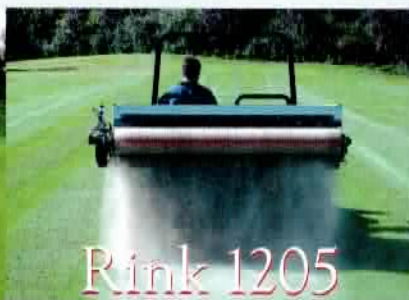

Rink 1205

Rink 1205 is for Trucksters and covers the wheelmarks of the Truckster due to its working width of 1.8m



Twin spinners

Twin spinner discs are optional for Rink models 1010, 1205, 1210 and 1520



Breaking barriers to better turf.


# EASY-SPREAD

## Self loading top dresser

The Easy Spread loads itself. It is easy because it is a simple one man operation that will spread up to 80 tons a day without the operator leaving the tractor seat.



The Easy Spread is very close coupled.

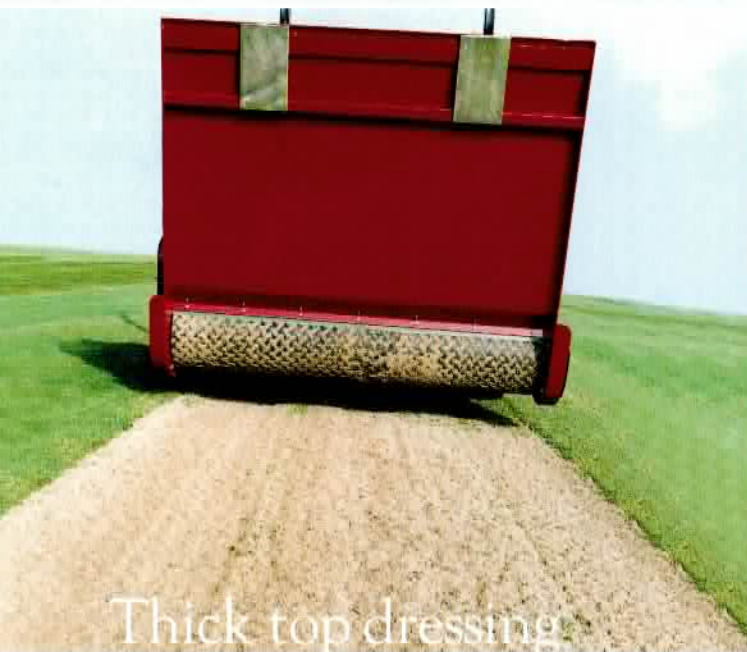

Thick top dressing



Light top dressing

## Technical Specifications EASY-SPREAD

Model	1300	1600
Length	780mm (31")	780mm (31")
Width	1430mm (56")	1730mm (68")
Height	1200mm (48")	1200mm (48")
Working width	1300mm (52")	1600mm (63")
Weight	265Kg (583lbs)	325kg (713lbs)
Tractor size	28hp liftcap 1000Kg (2200lbs) and double hydraulic outlet.	38hp liftcap 1400Kg (3080 lbs) and double hydraulic outlet.
Hopper capacity	0.5m <sup>3</sup> (17.5qu. ft.)	0.75m <sup>3</sup> (26.3qu.ft.)
3-point connection	CAT 1-2	
Operation	Hydraulically driven drum with independent speed regulation	
Spreading thickness	0- 10mm, (0-0.4") depending on ground speed and drum speed setting.	
Hopper loading	Self loading by tipping hopper hydraulically.	



Breaking barriers to better turf.