

seppi m.®

MULCHING EQUIPMENT SPECIALISTS



Quality by Design

FLAIL MULCHERS MEDIUM DUTY

**SML - SMWA REV CF - SMWA S
SMWO - SMWA SLIM - SMWA K
SMO - SMO REV CF - SMO FH**

20 - 95 HP



INNOVATION

- > over 70 years experience
mulching equipment specialists since 1971
- > continuous research for new solutions and technologies
- > optimal material, with low wear

QUALITY

- > every machine is tested before leaving the factory
- > use of the best components only
- > low wear

RELIABILITY

- > high performance machines
- > close to customer sales and service network
- > fast and efficient customer care

FLAIL MOWERS MEDIUM DUTY (UP TO 95 HP)



Professional flail mowers for more than 45 years!

For over 45 years SEPPI flail mowers have been working to satisfy professionals in agriculture and greenspace maintenance.

Strength and reliable performance, both in grass and wood, saves time and costs compared to less professional machines.


With a vast range of options and accessories, every machine can be equipped to meet specific professional needs, individual requirements or working conditions.

This is why SEPPI mulchers are so popular with professional users!


SEPPI flail mowers (medium duty):

- › power from 20 to 95 HP
- › mulches grass, prunings and bushes up to 7 cm [2.8"] in diameter

How to work with a SEPPI flail mower?

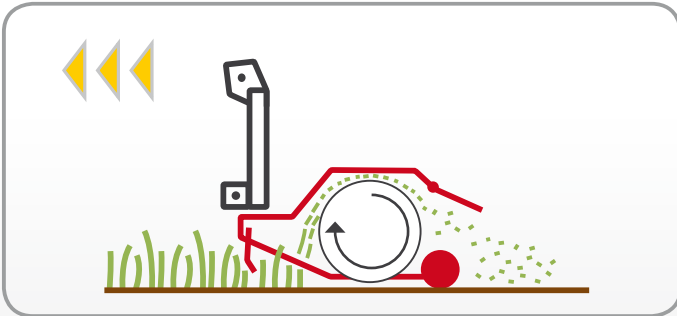

Open rear hood: to mulch grass with low power consumption

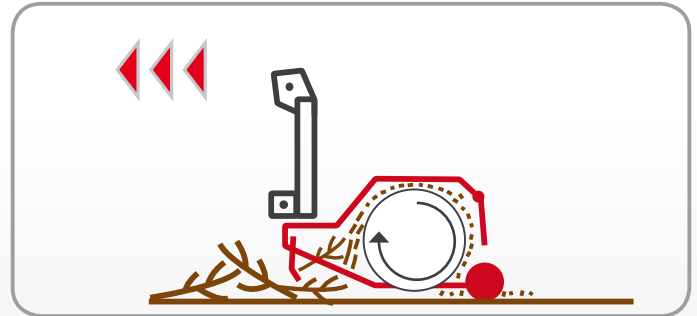

Closed rear hood: to smoothly mulch prunings and branches

The SEPPI range of flail mowers



Powerful but light!

features	SML
mulches grass and prunings up to	3 cm [1.2"] Ø
working speed	3-10 km/h
ISO 3-point rear linkage	cat. 1
position of the linkage adjustable (2 slots)	by 17 cm [6.7"]
gearbox with freewheel	540 rpm
input shaft	1 3/8" Z=6
number belts	3
support roller, adjustable in height	standard
front protection	metal flaps
rear protection	rubber flap
standard flails	SMW


The SML flail mower is ideal for small HP tractors. Several different options are available for the machine, guaranteeing a perfect result, whatever the conditions.

OPT	options
008	PTO drive shaft
031	rotor with Y knives on shackles
162	chevrons for transportation on public roads



position of the rear linkage adjustable

standard: rotor with SMW flails



OPT 031: rotor with Y knives



SML									
working width cm ["]	overall width cm ["]	depth cm ["]	height cm ["]	weight* kg [lb]	SMW flails standard #	Y-knives OPT 031 #	roller mm ["] Ø	kW** min-max	HP** min-max
105 [41]	125 [49]	90 [35]	95 [37]	265 [580]	18	9	133 [5.2]	15-29	20-40
125 [49]	145 [57]	90 [35]	95 [37]	290 [640]	24	12	133 [5.2]	15-29	20-40
155 [61]	175 [69]	90 [35]	95 [37]	330 [720]	27	15	133 [5.2]	15-29	30-40
175 [69]	195 [77]	90 [35]	95 [37]	350 [770]	33	18	133 [5.2]	15-29	30-40
200 [79]	220 [87]	90 [35]	95 [37]	380 [840]	39	21	133 [5.2]	15-29	35-40

* The weight of the machine is approximate, it refers to the standard version without any options and it may vary.
 ** The indicated kW and HP refer to the power required at the PTO output shaft, not to the nominal tractor power.



Reversible flail mulcher for compact tractors.

features	SMWA rev cf
mulches grass and prunings up to	5 cm [2"] Ø (225: 3 cm)
working speed	3-10 km/h
ISO 3-point linkage	cat. 1 & 2, reverse drive
position of the linkage adjustable (2 slots)	by 17 cm [6.7"]
gearbox with freewheel and through shaft	540 rpm
input shaft	1 3/8" Z=6
number belts	up to 155 cm: 3 from 175 cm: 4
support roller, adjustable in height	standard
adjustable hood with rubber protection	standard
front protection	metal flaps or chains
standard rotor	SMW flails

OPT	options
008	PTO drive shaft
030	rotor with Y knives
018	1000 rpm gearbox
066	gearbox with automatic inverter and double freewheel
096	additional 3-point linkage
028	rake hood with rakes
006	additional rubber front protection
162	chevrons for transportation on public roads
-	equipment for under canopy maintenance (see separate brochure)




GS EN13524
(types 175/200 + OPT006)
rubber protection against
impact of stones

Agriculture or greenspace maintenance?

All easy – with a strong flail mower mulching grass, prunings and bushes up to 5 cm [2"] in diameter.

The **SMWA rev cf** standard version has manual side shift with two position bolt-on hitch: central and 17 cm [6.7"] to the right.

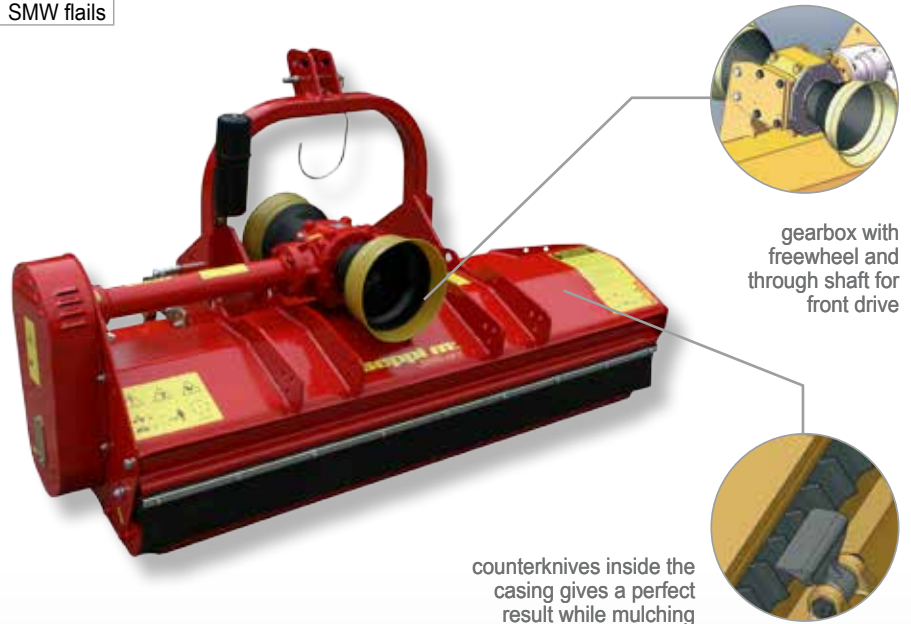

gearbox with freewheel and through shaft for front drive

counterknives inside the casing gives a perfect result while mulching

SMWA rev cf										
working width cm ["]	overall width cm ["]	depth cm ["]	height cm ["]	weight* kg [lb]	flails standard #	Y-knives OPT 030 #	roller mm ["] Ø	kW** min-max	HP** min-max	
85 [34]	97 [38]	90 [35]	95 [37]	260 [570]	9	12	133 [5.2]	14-41	20-55	
95 [37]	107 [42]	90 [35]	95 [37]	290 [640]	9	12	133 [5.2]	14-41	20-55	
105 [41]	117 [46]	90 [35]	95 [37]	310 [680]	9	15	133 [5.2]	14-41	20-55	
115 [45]	127 [50]	90 [35]	95 [37]	320 [700]	12	15	133 [5.2]	16-41	21-55	
125 [49]	137 [54]	90 [35]	95 [37]	330 [730]	12	18	133 [5.2]	16-48	21-65	
135 [53]	147 [58]	90 [35]	95 [37]	360 [790]	12	18	133 [5.2]	19-48	26-65	
145 [57]	157 [62]	90 [35]	95 [37]	390 [860]	15	21	133 [5.2]	19-48	26-65	
155 [61]	167 [66]	90 [35]	95 [37]	420 [920]	15	21	133 [5.2]	22-48	30-65	
175 [69]	187 [74]	90 [35]	95 [37]	440 [970]	18	24	133 [5.2]	22-52	30-70	
200 [79]	212 [84]	90 [35]	95 [37]	470 [1,030]	21	30	133 [5.2]	26-52	35-70	
225 [89]	237 [93]	90 [35]	95 [37]	490 [1,080]	24	33	133 [5.2]	26-52	35-70	

* The weight of the machine is approximate, it refers to the standard version without any options and it may vary.
** The indicated kW and HP refer to the power required at the PTO output shaft, not to the nominal tractor power.



Reversible & with side shift!

features	SMWA s
mulches grass and prunings up to working speed	5 cm [2"] Ø 3-10 km/h
ISO 3-point linkage, reverse drive	up to 135 cm: cat. 1 from 145 cm: cat. 1 & 2
side shift	linear hydraulic 27 cm [11"]
gearbox with freewheel and through shaft input shaft	540 rpm 1 3/8" Z=6
number belts	up to 155 cm: 3 from 175 cm: 4
support roller, adjustable in height	standard
adjustable hood with rubber protection	standard
front protection	metal flaps or chains
standard rotor	SMW flails

OPT	options
008	PTO drive shaft
030	rotor with Y knives
018	1000 rpm gearbox
066	gearbox with freewheel
096	additional 3-point linkage
028	rake hood with rakes
006	additional rubber front protection
XAN	sweeper
XID	herbicide spraying system
162	chevrons for transportation on public roads




counterknives inside the casing gives a perfect result while mulching



gearbox with freewheel and through shaft for front drive



SMWA s
linear side shift
L = working width
D = 27 cm [10"]

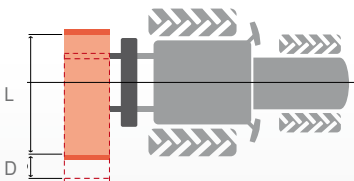

SMWA s										
working width cm ["]	overall width cm ["]	depth cm ["]	height cm ["]	weight* kg [lb]	flails standard #	Y-knives OPT 030 #	roller mm ["] Ø	kW** min-max	HP** min-max	
105 [41]	117 [46]	90 [35]	95 [37]	310 [680]	9	15	133 [5.2]	14-41	20-55	
115 [45]	127 [50]	90 [35]	95 [37]	320 [700]	12	15	133 [5.2]	16-41	21-55	
125 [49]	137 [54]	90 [35]	95 [37]	330 [730]	12	18	133 [5.2]	16-48	21-65	
135 [53]	147 [58]	90 [35]	95 [37]	360 [790]	12	18	133 [5.2]	19-48	26-65	
145 [57]	157 [62]	90 [35]	95 [37]	390 [860]	15	21	133 [5.2]	19-48	26-65	
155 [61]	167 [66]	90 [35]	95 [37]	420 [920]	15	21	133 [5.2]	22-48	30-65	
175 [69]	187 [74]	90 [35]	95 [37]	440 [970]	18	24	133 [5.2]	22-52	30-70	
200 [79]	212 [84]	90 [35]	95 [37]	470 [1,030]	21	30	133 [5.2]	26-52	35-70	

* The weight of the machine is approximate, it refers to the standard version without any options and it may vary.
** The indicated kW and HP refer to the power required at the PTO output shaft, not to the nominal tractor power.



Ultra slim mulching mower!

features	SMWA slim
mulches grass and prunings up to	5 cm [2"] Ø
working speed	3-10 km/h
ISO 3-point linkage	cat. 1 & 2, reversible
side shift	linear hydraulic
gearbox with freewheel and through shaft	540 rpm
input shaft	1 3/8" Z=6
power belts	2+3
low belt protection	standard
support roller, adjustable in height	standard
adjustable hood with rubber protection	standard
front protection	metal flaps or chains
standard rotor	SMW flails

The innovative drive concept and compact design make the **SMWA slim** highly manoeuvrable in tight situations.

It allows the machine to mulch very close to the crop. Also it can work directly under the canopy without damaging fruit.

OPT	options
008	PTO drive shaft
030	rotor with Y knives
018	1000 rpm gearbox
066	reinforced roller
096	additional 3-point linkage frame
028	rake hood with rakes
006	additional rubber front protection
XAN	sweeper
XID	herbicide spraying system
162	chevrons for transportation on public roads

the power belts are very compact - this allows the machine to work very close to the crop


reversible linkage



hydr. side shift

SMWA slim linear side shift

L = working width
D = 14 cm [5.5"]

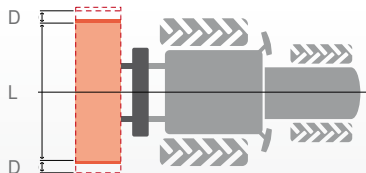

SMWA slim										
working width cm ["]	overall width cm ["]	depth cm ["]	side height cm ["]	hitch height cm	weight* kg [lb]	flails standard #	Y-knives OPT 030 #	roller mm ["] Ø	kW** min-max	HP** min-max
135 [53]	143 [56]	90 [35]	54 [21]	110 [43]	405 [893]	12	18	133 [5.2]	19-48	26-65
145 [57]	153 [60]	90 [35]	54 [21]	110 [43]	415 [915]	15	21	133 [5.2]	19-48	26-65
155 [61]	163 [64]	90 [35]	54 [21]	110 [43]	465 [1,025]	15	21	133 [5.2]	22-48	30-65
175 [69]	183 [72]	90 [35]	54 [21]	110 [43]	480 [1,058]	18	24	133 [5.2]	22-48	30-65
200 [79]	208 [82]	90 [35]	54 [21]	110 [43]	535 [1,180]	21	30	133 [5.2]	26-48	35-65
225 [89]	233 [92]	90 [35]	54 [21]	110 [43]	590 [1,300]	24	33	133 [5.2]	26-48	35-65


* The weight of the machine is approximate, it refers to the standard version without any options and it may vary.
** The indicated kW and HP refer to the power required at the PTO output shaft, not to the nominal tractor power.



Power in a light package !


features	SMWA κ
mulches grass and prunings up to	5 cm [2"] Ø with forestry rotor 12 cm [5"]
working speed	3-10 km/h
ISO 3-point linkage	cat. 1 & 2, reverse drive
position of the linkage adjustable (2 slots)	by 17 cm [6.7"]
gearbox with manual inverter without freewheel	540 rpm
input shaft	1 3/8" Z=6
belts	4
support roller, adjustable in height	standard
adjustable hood with rubber protection	standard
front protection	double chains
standard rotor	flails SMW duo

OPT	options
011	PTO drive shaft with freewheel
030	rotor with Y knives
240	forestry rotor with swinging hammers, available for 155+175 cm [61+69"]
018	1000 rpm gearbox
027	roller scraper
162	chevrons for transportation on public roads



counterknives inside the casing gives a perfect result while mulching

linkage frame suitable for most current implement carriers and for tractors with reverse drive



hydraulic front hood

reinforced belt protection

wide-open front hood to mulch high grass




Compact mulcher for professional & univereal use with specific characteristics


Rotor with SMW duo, Y knife and swinging hammers work with both rotation directions.

With a double skin casing made of wear resistant steel, the **SMWA k** is a perfect mulcher for exacting conditions. The lightweight construction allows work on sloping ground. With a manual inverter the mulching result can be optimized. Depending on the direction of the rotor shaft it mulches low or high grass and brush.


standard:
rotor with SMW duo




OPT 030:
rotor with Y knives



OPT 240:
Forstrotor mit Schlägeln



Safe working thanks to the innovative STOPSAFE™ System:
The movement will stop when used incorrectly, minimizing material throw-out.

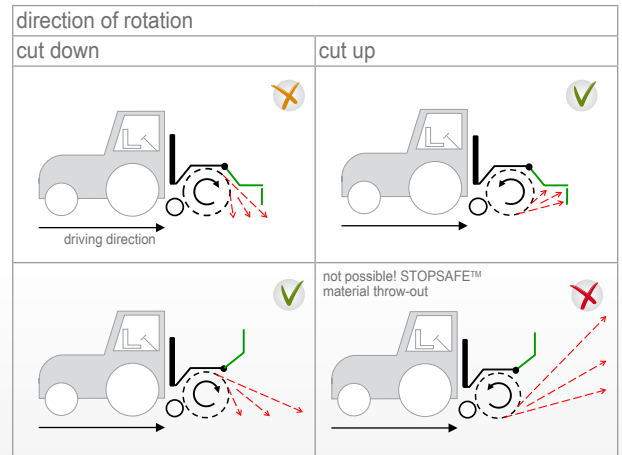

HARDOX®
WEAR PLATE

chassis made of wear-resistant steel reinforced by additional plates

SMWA κ										
working width cm ["]	overall width cm ["]	depth cm ["]	height cm ["]	weight* kg [lb]	standard flails #	Y-knives OPT 030 #	hammers OPT 240 #	roller mm ["] Ø	kW** min-max	HP** min-max
155 [61]	167 [66]	90 [35]	105 [41]	425 [940]	15	21	26	152 [6.0]	26 - 52	35 - 70
175 [69]	187 [74]	90 [35]	105 [41]	480 [1060]	18	24	29	152 [6.0]	26 - 52	35 - 70
200 [79]	212 [84]	90 [35]	105 [41]	540 [1190]	21	30	X	152 [6.0]	26 - 52	35 - 70
225 [89]	237 [93]	90 [35]	105 [41]	610 [1350]	24	33	X	152 [6.0]	26 - 52	35 - 70

* The weight of the machine is approximate, it refers to the standard version without any options and it may vary.
** The indicated kW and HP refer to the power required at the PTO output shaft, not to the nominal tractor power.



Mulcher with generous side shift.

features	SMWO
mulches grass and prunings up to	5 cm [2"] Ø
working speed	3-10 km/h
ISO 3-point linkage	cat. 1 & 2
parallel linkage side shift	standard
gearbox with freewheel and through shaft	540 rpm
input shaft	1 3/8" Z=6
number belts	up to 155 cm: 3 from 175 cm: 4
support roller, adjustable in height	standard
adjustable hood with rubber protection	standard
front protection	metal flaps or chains
standard rotor	SMW flails


The model **SMWO** is distinguished by an extraordinarily wide side shift to the right.

The parallel linkage system allows the machines to work under the trees and close to the crop leaving a much cleaner result.

OPT	options
008	PTO drive shaft
030	rotor with Y knives
018	1000 rpm gearbox
046	hydraulic side shift
028	rake hood with rakes
006	additional rubber front protection
162	chevrons for transportation on public roads
-	equipment for under canopy maintenance (see separate brochure)



counterknives inside the casing gives a perfect result while mulching




rake hood with rakes to pick up prunings



SMWO (standard) parallel linkage side shift

L = 125-150 L = 155-200
 d = 73 cm [29"] d = 81 cm [32"]
 D = 62 cm [24"] D = 62 cm [24"]

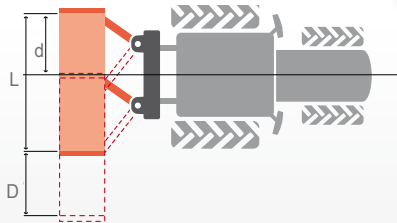

SMWO									
working width cm ["]	overall width cm ["]	depth cm ["]	height cm ["]	weight* kg [lb]	SMW flails standard #	Y-knives OPT 030 #	roller mm ["] Ø	kW** min-max	HP** min-max
125 [49]	137 [54]	120 [47]	95 [37]	350 [774]	12	18	133 [5.2]	16-48	21-65
135 [53]	147 [58]	120 [47]	95 [37]	400 [878]	12	18	133 [5.2]	19-48	26-65
145 [57]	157 [62]	120 [47]	95 [37]	420 [926]	15	21	133 [5.2]	19-48	26-65
155 [61]	167 [66]	120 [47]	95 [37]	430 [948]	15	21	133 [5.2]	22-48	30-65
175 [69]	187 [74]	120 [47]	95 [37]	480 [1,050]	18	24	133 [5.2]	22-52	30-70
200 [79]	212 [83]	120 [47]	95 [37]	500 [1,100]	21	30	133 [5.2]	26-52	35-70

* The weight of the machine is approximate, it refers to the standard version without any options and it may vary.
 ** The indicated kW and HP refer to the power required at the PTO output shaft, not to the nominal tractor power.




The expert with extra wide side shift.

features	SMO
mulches grass and prunings up to	7 cm [2.8"] Ø
working speed	3-10 km/h
ISO 3-point linkage, reverse drive	up to 225 cm: cat. 1 & 2 from 250 cm: cat. 2
parallel linkage side shift	standard
gearbox with freewheel and through shaft	up to 200 cm: 540 rpm from 225 cm: 1000 rpm
input shaft	1 3/8" Z=6
number belts	up to 200 cm: 4 from 225 cm: 5
support roller, adjustable in height	standard
adjustable hood with rubber protection	standard
front protection	metal flaps or chains
standard rotor	up to 200 cm: SMW flails from 225 cm: SMO flails

OPT	options
008	PTO drive shaft
030	rotor with Y knives
019	540 rpm gearbox
018	1000 rpm gearbox
046	hydraulic side shift
209	side shift central bilateral
028	rake hood with rakes
035	rubber gauge wheels
006	additional rubber front protection
162	chevrons for transportation on public roads
-	equipment for under canopy maintenance (see separate brochure)

SMO (standard) parallel linkage side shift


L = working width
d = 69 cm [27"]
D = 73 cm [28"]

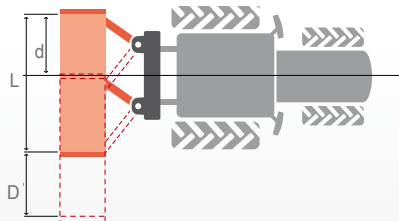

The model SMW is distinguished by an extraordinarily wide side shift to the right.

The standard version is equipped with manual side shift, hydraulic side shift is optional. Total side shift is 73 cm [28.7"].

As an option it is also available with central position and side shift to both sides.



adjustable rear hood to control the degree of mulching



rubber gauge wheels (option): protects the roller on uneven grounds and if there are stones



SMO										
working width cm ["]	overall width cm ["]	depth cm ["]	height cm ["]	weight* kg [lb]	SMW flails standard #	Y-knives OPT 030 #	roller mm ["] Ø	kW** min-max	HP** min-max	
125 [49]	140 [55]	120 [47]	120 [47]	460 [1,010]	12	18	133 [5.2]	29-63	40-85	
150 [59]	165 [65]	120 [47]	120 [47]	490 [1,080]	15	21	133 [5.2]	29-63	40-85	
175 [69]	190 [75]	120 [47]	120 [47]	540 [1,190]	18	21	133 [5.2]	29-63	40-85	
200 [79]	215 [85]	120 [47]	120 [47]	590 [1,300]	21	30	133 [5.2]	35-63	48-85	
225 [89]	240 [95]	120 [47]	120 [47]	650 [1,430]	24	33	152 [6.0]	35-70	48-95	
250 [98]	265 [104]	120 [47]	120 [47]	710 [1,560]	27	36	152 [6.0]	41-70	55-95	

* The weight of the machine is approximate, it refers to the standard version without any options and it may vary.
** The indicated kW and HP refer to the power required at the PTO output shaft, not to the nominal tractor power.



Professional mulcher with reversible linkage.

Road sides, meadows, pastures – the **SMO rev cf** satisfies the needs of professionals in the most varied situations with an ever clean cut.


features	SMW rev cf
mulches grass and prunings up to working speed	7 cm [2.8"] Ø (275: 5 [2"])
ISO 3-point linkage	cat. 2 central fixed, reversible
gearbox with freewheel and through shaft input shaft	1000 rpm 1 3/8" Z=6
number belts	up to 200 cm: 4 from 225 cm: 5
support roller, adjustable in height	standard
adjustable hood with rubber protection	standard
front protection	metal flaps or chains
standard rotor	up to 200 cm: SMO flails from 225 cm: SMW flails

OPT	options
008	PTO drive shaft
030	rotor with Y knives
019	540 rpm gearbox
066	gearbox with automatic inverter and double freewheel for reversible tractors
096	additional 3-point-linkage frame
028	rake hood with rakes
006	additional front rubber flap
035	rubber gauge wheels
162	chevrons for transportation on public roads
-	equipment for under canopy maintenance (see separate brochure)


the metal flap safety protection prevents material from flying out of the machine



counterknives inside the casing gives a perfect result while mulching



reversible linkage for front or rear mount

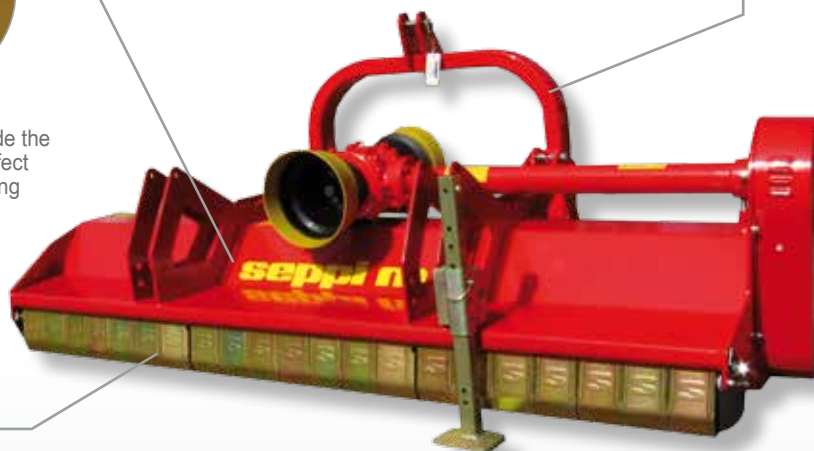

SMO rev cf									
working width cm ["]	overall width cm ["]	depth cm ["]	height cm ["]	weight* kg [lb]	SMW flails standard #	Y-knives OPT 030 #	roller mm ["] Ø	kW** min-max	HP** min-max
150 [59]	165 [65]	120 [47]	120 [47]	470 [1,030]	15	21	133 [5.2]	29-63	40-85
175 [69]	190 [75]	120 [47]	120 [47]	540 [1,190]	18	24	133 [5.2]	29-63	40-85
200 [79]	215 [85]	120 [47]	120 [47]	580 [1,280]	21	30	133 [5.2]	35-63	48-85
225 [89]	240 [95]	120 [47]	120 [47]	630 [1,380]	24	33	152 [5.2]	35-70	48-95
250 [98]	265 [104]	120 [47]	120 [47]	690 [1,520]	27	36	152 [5.2]	41-70	55-95
275 [108]	280 [110]	120 [47]	120 [47]	740 [1,630]	27	39	152 [5.2]	41-70	55-95

* The weight of the machine is approximate, it refers to the standard version without any options and it may vary.
** The indicated kW and HP refer to the power required at the PTO output shaft, not to the nominal tractor power.




With reversible linkage & extra wide side shift.


features	SMO fh
mulches grass and prunings up to	7 cm [2.8"] Ø
working speed	3-10 km/h
ISO 3-point linkage	cat.1 & 2, reversible
side shift	linear hydraulic
gearbox with freewheel and through shaft	1000 rpm
input shaft	1 3/8" Z=6
number belts	up to 200 cm: 4 from 225 cm: 5
support roller, adjustable in height	standard
adjustable hood with rubber protection	standard
front protection	metal flaps or chains
standard rotor	up to 200 cm: SMO flails from 225 cm: SMW flails

OPT	options
008	PTO drive shaft
030	rotor with Y knives
019	540 rpm gearbox
066	gearbox with automatic inverter and double freewheel for reversible tractors
006	additional front rubber flap
162	chevrons for transportation on public roads
-	equipment for under canopy maintenance (see separate brochure)


SMO fh
linear side shift
 L = working width
 150-175 cm: D = 17 cm [7"]
 200-275 cm: D = 28 cm [11"]

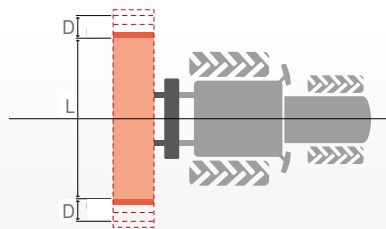

The compact side shift prevents damage to trees and enables the operator to avoid obstacles. Weight is close to the tractor.



adjustable hood for adjusting the degree of mulching

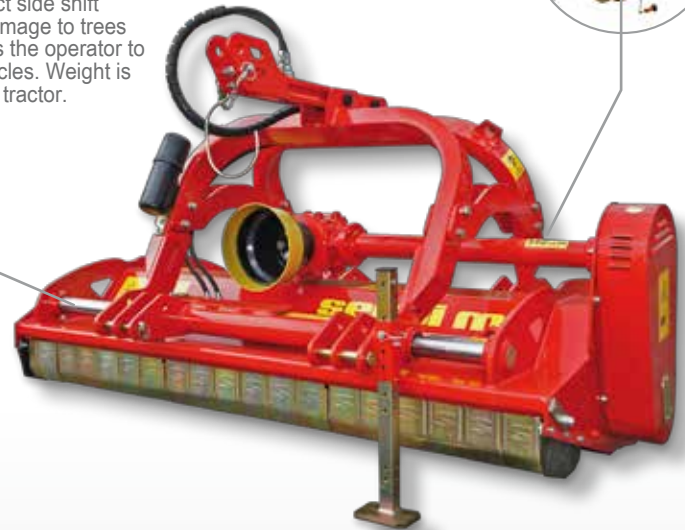

SMO fh										
working width cm ["]	overall width cm ["]	depth cm ["]	height cm ["]	weight* kg [lb]	SMW flails standard #	Y-knives OPT 030 #	roller mm ["] Ø	kW** min-max	HP** min-max	
125 [49]	140 [55]	120 [47]	120 [47]	460 [1,010]	12	18	133 [5.2]	29-63	40-85	
150 [59]	165 [65]	120 [47]	120 [47]	490 [1,080]	15	21	133 [5.2]	29-63	40-85	
175 [69]	190 [75]	120 [47]	120 [47]	540 [1,190]	18	21	133 [5.2]	29-63	40-85	
200 [79]	215 [85]	120 [47]	120 [47]	590 [1,300]	21	30	133 [5.2]	35-63	48-85	
225 [89]	240 [95]	120 [47]	120 [47]	650 [1,430]	24	33	152 [6.0]	35-70	48-95	
250 [98]	265 [104]	120 [47]	120 [47]	710 [1,560]	27	36	152 [6.0]	41-70	55-95	

* The weight of the machine is approximate, it refers to the standard version without any options and it may vary.
 ** The indicated kW and HP refer to the power required at the PTO output shaft, not to the nominal tractor power.



Maintenance in the Orchards & Vineyards and Equipment for Organic Farming

In order to keep the orchards clean, SEPPI M. offers a classic spraying system as well as several mechanical attachments for organic farming. The accessories are connected to the mulcher with the **quick coupling system X-FAST**. Some of the attachments can also be coupled to the **carrier PORT-X** with 3-point-linkage.

Below you can find an overview of our accessories.
For further details refer to the brochure **EQUIPMENT for UNDER CANOPY MAINTENANCE**



The **outrigger XSC** is specialized for inter-row mowing. The double XSC outrigger also adapts to row widths. This makes mowing much faster and more efficient.



The **cultivator XSA** supports organic agriculture. A mechanical process cuts the roots of weeds and brings them to the surface.



The brushes of the **shoot remover XSP** clean the trunk and remove shoot, suckers and straw mechanically – without chemicals.



With the **sweeper XAN** you may collect leaves and prunings from row sides and bring them into an ideal position for mulching: in front of the mulching mower.



The **conveyor belt XTR** deposits grass to the right of the mulcher. This inhibits the growth of the grass and allows to reduce the use of chemicals.



The **herbicide spraying system XID** may be mounted to many SEPPI mowers. High-precision nozzles come with adjustable spraying direction.

Rotors and Tools

- ▶ Flail and flail holder made from forged and tempered steel
- ▶ High abrasion resistance and toughness
- ▶ Self sharpening thanks to ideal cutting and free angle
- ▶ High tensile bolt, bolt head protected from wear
- ▶ Special safety nut



ROTOR WITH FLAILS




SMW

SMO

SMW DUO

SMW/SMO: standard on SML, SMWA ref cf, SMWA s, SMWA slim, SMWO, SMO, SMO rev cf and SMWO fh
SMW DUO: standard on SMWA k

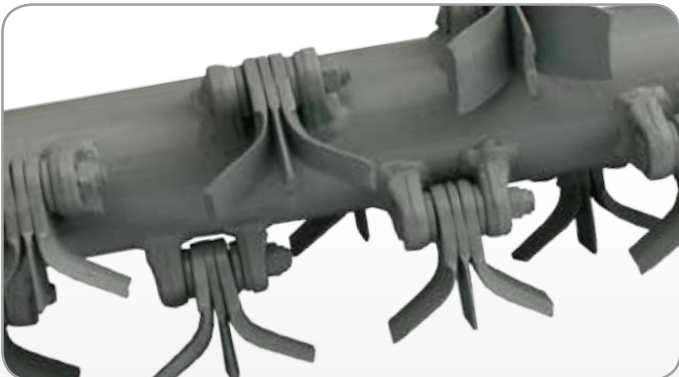

ROTOR WITH KNIVES



SMW

SMO

SML

SMW/SMO: option on SMWA ref cf, SMWA s, SMWA slim, SMWA k, SMWO, SMO, SMO rev cf and SMWO fh
knives on shackles: option on SML



FORESTRY ROTOR WITH FLAILS



SMW FORST

option on SMWA k

All contents reserved.
 Specifications are subject to change without prior notice.

The Advantage of High Quality

Mulching Equipment Pioneers

Founded in 1939 by Max Seppi, SEPPi M. is now one of the foremost manufacturer in its sector - not only in Europe, but worldwide. A pioneer like no other, SEPPi has been manufacturing mulching equipment for more than 45 years. SEPPi's mission is "To improve the professional's work through innovative and efficient solutions".

The many years of experience, together with the tireless research for more advanced technologies and more resistant materials result in the premium quality of the SEPPi equipment with tough machines that are reliable even under extreme working conditions.

The biggest gratification over the past 75 years has been our satisfied customers, who have benefitted from long and efficient work with the SEPPi equipment – a continuous motivation to keep on focusing on high quality! The family-based character of the company today being led by the third generation, stands for fair and responsible business relationships.

Discover the many advantages of owning SEPPi equipment!



AGRICULTURAL, FORESTRY AND INDUSTRIAL MOWERS

SEPPi M. S.p.A. - Zona Artigianale 1 - I-39052 Caldaro (Bolzano) Italy
Tel. +39 0471 963550 - Fax +39 0471 962547 - sales@seppi.com - www.seppi.com



AUTHORIZED DEALER

Ask our team for further information!